

ProLine

TS 93 E

The ProLine TS 93 E drying cabinet offers efficient hang drying for sensitive or hard to dry garments and textiles that should not be tumble dried, drying without mechanical action at exactly the right temperature and humidity. Featuring low energy consumption and short drying cycles comparable to standard tumble dryers, the TS 93 cabinet has large internal hanging space with racks that swing out for easy loading and unloading. A built-in sanitization program greatly reduces allergens and bacterial contaminants while manual and automatic programs allow for total flexibility during the drying process.

Fast drying cabinet

TS 93 E is an efficient drying cabinet. If it is important that it goes quickly, the TS 93 E is an optimal drying cabinet.

Saves energy


TS 93 E is equipped with HTS (Humidity Tracking System) which senses the moisture level and interrupts the drying process exactly when the laundry is dry. TS 93 E consumes only 6.4 kWh / drying cycle.

Standard Features

- HTS - Humidity Tracking System with temperature and humidity sensors.
- High temperature programs, up to 195F, greatly reduces bacterial contaminants and allergens.
- Microprocessor control with manual and automatic modes.
- Hanging rail rotates out 90° and doors open 190°.
- Double overheat protection with backup sensor for increased safety.
- Electric heated.
- Interior lighting.
- Easy to navigate programs with display, buttons and braille. Easy to reach display panel.
- Four automatic drying programs and one timed program.
- Adjustable preset start time.
- Adjustable feet from the inside of the cabinet.
- Powder coated galvanized steel.

Optional Features

- Single hanging bar.
- Door hook racks attached on the inside of the door for additional accessories.

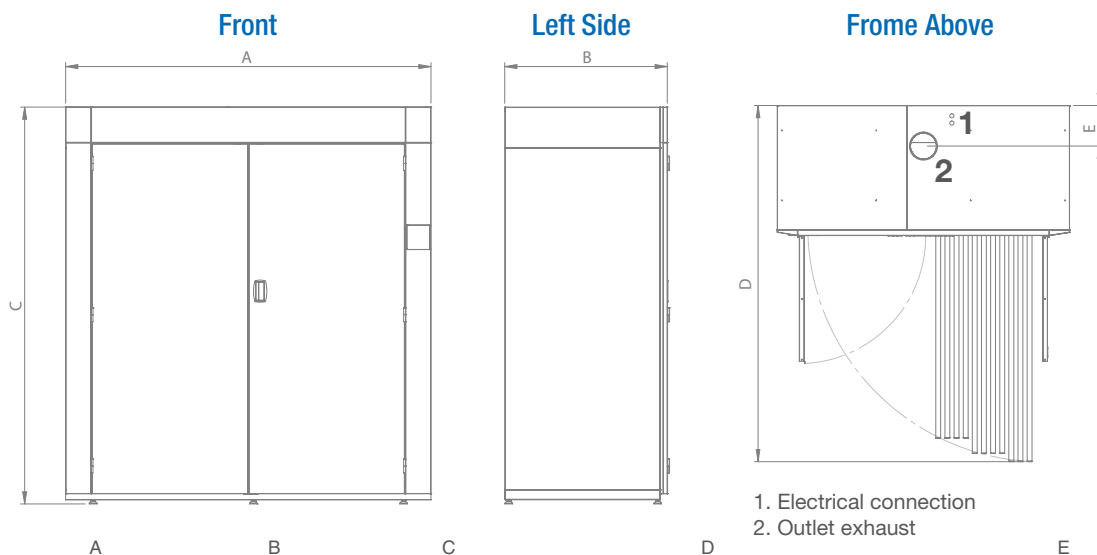

1. Electrical connection
2. Outlet exhaust

Dimensions in / mm

	A	B	C	D	E
	Width	Depth	Height	Depth hanging rail	Exhaust position from back
TS 93 E	71 / 1800	31.5 / 800	77 / 1955	204 / 2192	9.84 / 250

Technical Specifications ProLine TS 93 E

Main Data

Type	Air vented
Hanging length, ft / m	105 / 32
Capacity (dry weight), lbs / kg	35.3 / 16
Color	Grey
Product number	131034

Dimensions

Width x Depth x Height, in / mm	71 x 31.5 x 77 / 1800 x 800 x 1955
Hanging frame rotation, °	90
Door opening, °	190
Minimum ceiling height, in / mm	87.2 / 2215
Shipping dimensions, Width x Depth x Height, in / mm	75 x 31 x 42 / 1915 x 790 x 1060

Weight

Weight, lbs / kg	518 / 235
Shipping data net, lbs / kg	606 / 275

Sound level

Airborne sound level, dB(A)	65
-----------------------------	----

Consumption data, normal temperature

Drying capacity, oz/min / g/min	2.9 / 81
Energy consumption, kWh	6.4
Residual moisture before drying, %	43
Residual moisture after drying, %	0

Standard electrical connections

Electrical connection, 3P	208-240 V, 3P, 60Hz
Electrical connection, 1P (upon request)	208-240 V, 1P, 60Hz
Total effect, kW	9.5
Heating effect, kW	9
Breaker, A, 3P	40
Breaker, A, 1P	70

Air connections

Outlet exhaust, Ø in / mm	6.3 / 160
Outlet air flow, cfm / m³/h	210 / 350
Pressure drop, max psf / Pa	5.43 / 260
Maximum air flow (at 0% pressure), cfm / m3/h	353 / 600

Control

Languages, number	8
-------------------	---

Other

Prepared for payment system	Standard
Reversible hanging rack	Not available

Optional Accessories

Single Bar	131072
Hooks for Drying Cabinet (3 separate rows with 4 hooks on each, 1 set is for 1 door)	131071



PODAB Group, 1330 Main Street, Floor 2.
Sarasota, FL 34236, USA
sales@podab.us
+1 (800) 683-4873
www.podab.us